

**JOHN DEERE 1770 FRONT FOLD PLANTER
12 Row 30"**
**JOHN DEERE 7200 Flex and Rigid Fold Planter
8 and 12 Row**

Equipped with: 2975-172 (12 row only, mounting kit)
2990-167 or 2990-177 (mounting kit)
2990-176 (reinforcing bracket)
2995-035-L (left hand liquid fert. coulters with 3" offset shank)
2995-035-R (right hand liquid fert. coulters with 3" offset shank)

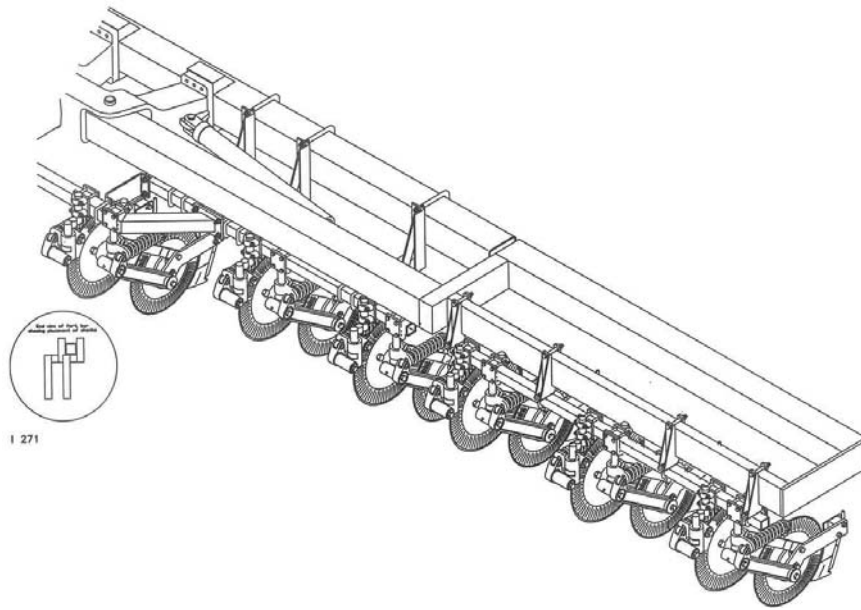


Illustration may not accurately depict row spacing.

Note - The two coulters for each row require 3" offset shanks and must be mounted a minimum distance of 2" - 3" from either side of the row. One shank mounts on the front of the bar and one mounts on the back of the bar with both being offset toward the front.

Note - This kit may be replaced by welding a short piece of 2 1/2" sq. tubing under the tongue, however Yetter Mfg. Co. is not responsible for any damage caused to the planter as a result of doing so.

Note - For double coulters with other coulters combinations, the same configuration shown would apply.