


**JOHN DEERE 1750 Conservation Planter  
JOHN DEERE 7200 Drawn Planter  
4, 6, and 8 Row**

*Equipped with:* 2975-130 -- 4 N/W & 6 N (front bar kit) or  
2975-131 -- 6 W & 8 N (front bar kit)  
2995-065-L/R liquid unit  
2990-154 – clamp kit  
2990-318 – 16” shank

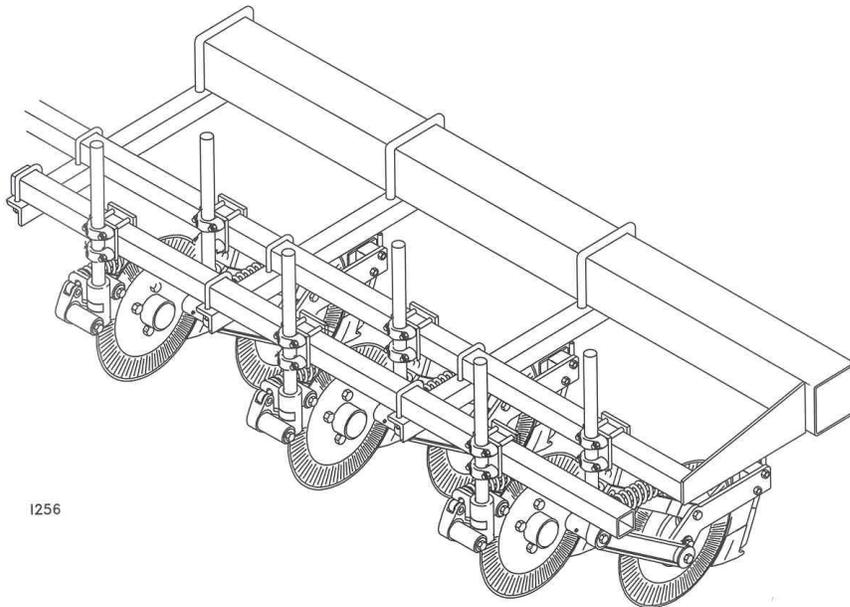

**(partial illustration of 6 row model shown)**

Illustration may not accurately depict row spacing.

**Note** - The two coulters for each row require straight shanks and must be mounted a minimum distance of 2"-3" from either side of the row. Each shank mounts on the front of the bar.

**Note** - For double coulters with other coulters combinations, the same configuration shown would apply.

Note - Double coulters are not applicable on 8 row 30" planter frames.